












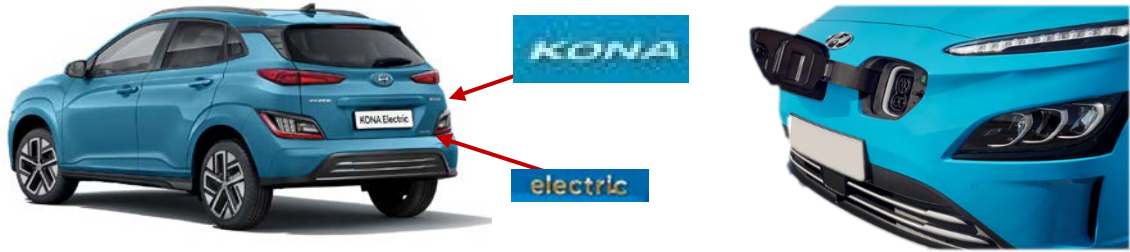

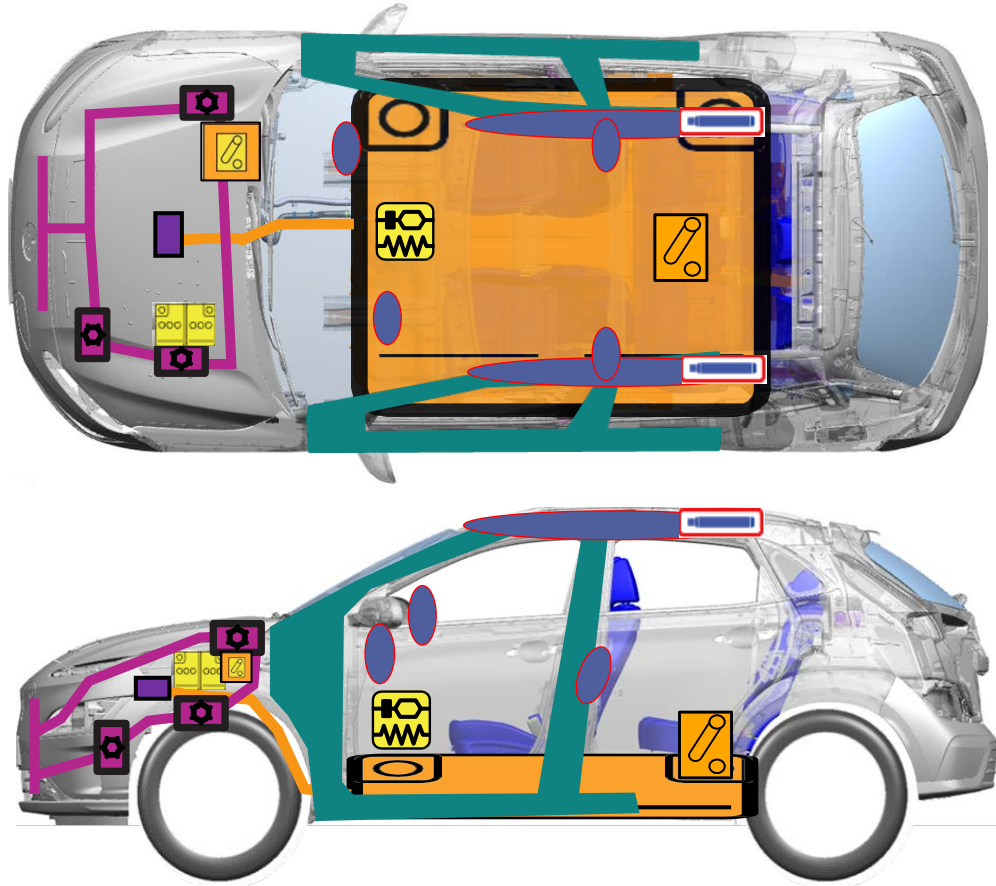

Vehicle Identification/Recognition




Accessing Vehicle




 Supplemental Restraint System Control Module (SRSCM)	 Airbag	 Airbag Gas Inflators
 High voltage cable	 12V Battery	 Air-conditioning line
 High Voltage Disconnect	 OBC (On – Board Charger)	 Ultra-High Strength Steel
 Low Voltage Disconnect for High Voltage	 Air-conditioning component	 Seat belt pretensioner
 High Voltage Battery		

Disabling Vehicle

1




2

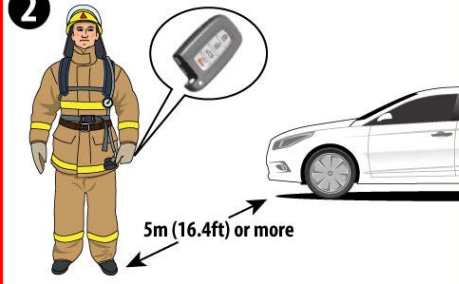

5m (16.4ft) or more

3 DISCONNECT NEGATIVE TERMINAL

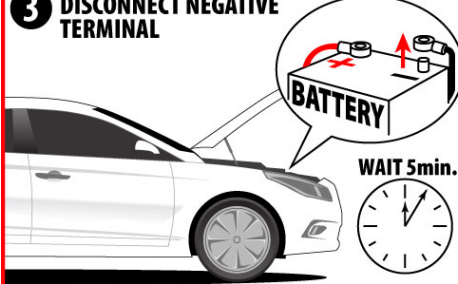


BATTERY


WAIT 5min.

OR

1

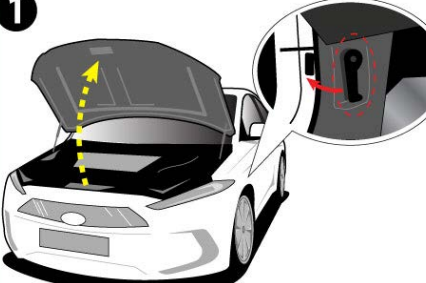


2



PULL OR CUT

3 DISCONNECT NEGATIVE TERMINAL

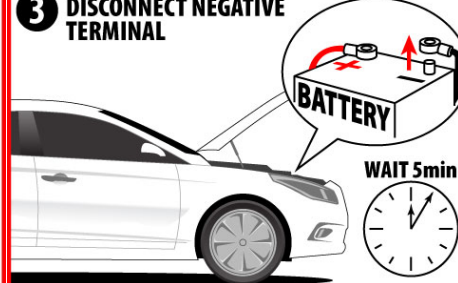

BATTERY

WAIT 5min.

OR

1



REMOVE REAR SEAT

2



3



REMOVE SAFETY PLUG

WAIT 5min.

Vehicle Towing Information

Tow the vehicle using a flat bed or using wheel dollies. Never tow the vehicle with the front or rear wheels on the ground



For further information, please refer to the Emergency Response Guide (ERG).

Applicable to Kona Electric vehicles first sold in the United States.	ID. No. KMH-OS EV	Version No. 01.2021.09	Page 2 of 2
---	----------------------	---------------------------	----------------